

HEATER SPECIFICATIONS

Burner Capacity	2,000,000 BTU
Airflow	12,000 CFM
Firing	Direct Fired Make Up Air With Modulation
Fuel	Natural Gas or Vapor Propane
Gas Pressure	1/2 psi min, Specify Available Gas and Pressure When Ordering
Power	208 - 240 Vac / 60 Hz / 1 Phase 208 - 240 / 480 Vac / 60 Hz / 3 Phase
Full Load	40A @ 240 Vac / 1 Phase 22A @ 240 Vac / 3 Phase 11A @ 480 Vac / 3 Phase
Air Discharge	24" Round Outlet
Discharge Temp.	190°F @ 0°F Ambient
Weight	2,200 Lbs.
Dimensions	101" (L) X 60" (W) X 64" (H)



STANDARD EQUIPMENT

- Heavy Duty Welded Construction
- Modulating Temperature Control w/50" Remote Thermostat
- Artic Wiring – Good for -80°F
- Electronic Flame Safety Control
- Fork Lift Pockets
- Y-Strainer & Gas Pressure Regulator
- Fireeye Flame Safeguard
- High & Low Temperature Shutdown
- Purge Cycle for Greater Safety
- Round Transition Discharge is Removable

OPTIONS

- Caster Wheels (adds 10" to overall height)
- Air Intake Extension
- 24" X 7' Discharge Duct Sections
- Ductable Discharge Outlet
- Gas Hoses For Natural Gas and Vapor Propane
- Auxiliary High Gas Pressure Regulator
- Flexible or Rigid Duct Sections
- Air Circulation Fans from 30" to 48" Diameter and 8,000 to 26,000 CFM

AH-22



2,000,000 BTU/HR

12,000 CFM

DIRECT FIRED



Intertek

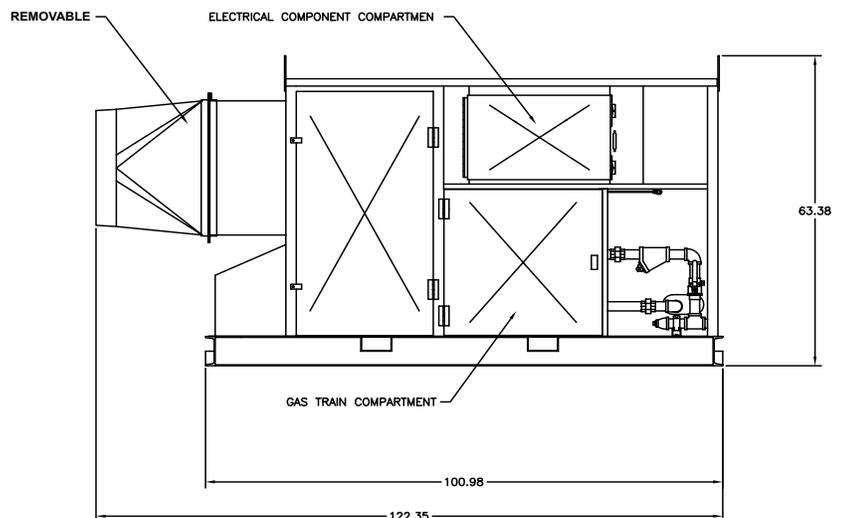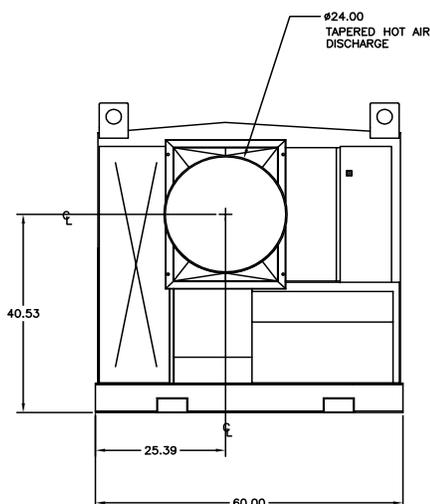

Specifications and dimensions are for reference only and are subject to change without notice.
Optional equipment may affect dimensions and weight.

Powerful, efficient, and incredibly reliable...



Typical uses for The TIOGA Air Heater

AH Series Air Heaters are ideal for

- Ground thaw
- Concrete deck pours
- Fireproofing
- Finish work
- Humidity control
- Air distribution
- Construction
- Remodeling
- Emergency Heat
- Bulk Material Handling
- Pulp and Paper
- Warehouses

Installed inside or outdoors, Tioga's unit draws in and heats clean outside air to deliver improved air quality for workers and reduce moisture issues over tube style heating units

Benefits

- Increase air circulation and air changes
- Pressurize the building
- Virtually eliminate moisture problems
- Safer to use and improved heat distribution over tube heaters
- Discharge temperature controls reduce fuel consumption and increase heating efficiency
- They help to offset natural infiltration
- Deliver your projects on schedule
- Maintain productivity

Tioga designs, manufactures and refurbishes rental units to like-new condition after every use.

Always check local codes and ordinances for permitted uses. CSA ratings may vary, contact office for current CSA information

Our heating specialists will assist you selecting the exact airflow and burner capacity required for your heating application.

Minneapolis, MN
 (763) 525-4000
 Fax (763) 525-9796

Evansville, WY
 (307) 237-3473
 Fax (307) 266-5016

Carroll, OH
 (740) 756-7980
 Fax (740) 756-7981

(800) 218-4642 • www.TiogaAirHeaters.com • Email: salesinfo@TiogaAirHeaters.com